



### OVERVIEW

- ♦ The HB909 UFO high bay luminaire is an enduring and high efficient solution for industrial applications where higher lumens are required.

### FEATURES

- ♦ Available with a 13in. nominal diameter
- ♦ Motion Sensor
- ♦ CRI greater than 70.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 130.
- ♦ 100-277V (50/60Hz)
- ♦ 1-10V Dimming.

### HOUSING

- ♦ Constructed from aluminum alloy.
- ♦ Sealed with stainless steel screws.

### LENS

- ♦ The tempered glass safety diffuser provides tough protection against all weather conditions.

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

QTY. \_\_\_\_\_

### APPLICATIONS

- ♦ Warehouses
- ♦ Factories
- ♦ Gymnasiums
- ♦ Big Box Retail Stores

### INSTALLATIONS

- ♦ Designed for pendant mount with chain.
- ♦ For individual applications.
- ♦ Suitable for ceiling surface mount with U brackets.

### LED

- ♦ The large diameter circuit board contains well spaced SMD Nichia chips, to produce a perfect combination of diffuse and effective illumination.

### WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

### LISTINGS/QUALIFICATIONS

- ♦ UL C/US
- ♦ DLC Premium Listed
- ♦ Suitable for Damp Location

DLC LISTED BY MFR: AGC



### ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **HB909-1-195L-50K-U-D2-120**

<b>HB909</b>	<b>1</b>			<b>U</b>	<b>D2</b>			
SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	BEAM ANGLE	OPTIONS	
<b>HB909</b>	<b>1</b> 13 IN.	<b>100W</b> 130L 13000 <b>150W</b> 195L 19500	<b>40K</b> 4000K <b>50K</b> 5000K	<b>U</b> 100-277V	<b>D2</b> 1-10V Dimming to 10%	<b>50</b> 50° <b>90</b> 90° <b>120</b> 120°	<b>Sensor Controls</b> <b>C1</b> Occupancy Control <b>C2</b> DALI Control <b>C3</b> Daylight Sensor Control <b>C4</b> ZigBee Wireless Control <b>Mounting / Other</b> <b>K2</b> Chain Kit <b>K4</b> U-Brackets	

100 WATTS LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
13000	4000K	100W	13000	130	✓
	5000K	100W	13000	130	✓



150 WATTS LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
19500	4000K	150W	19500	130	✓
	5000K	150W	19500	130	✓

### PHOTOMETRICS

Photometric reports are available at [www.ullighting.net](http://www.ullighting.net)

### DIMENSIONS

100W

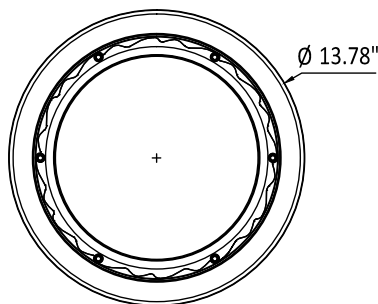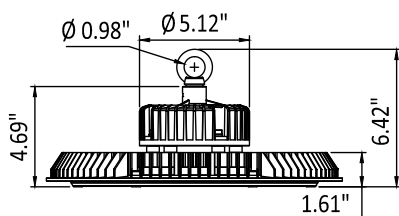

150W

