

PROJECT _____

TYPE _____

QTY. _____

OVERVIEW

- ♦ The LA617 is a modern sleek linear luminaire that provides a soft, shadow free illumination.

FEATURES

- ♦ Available in 2ft. / 4ft. / 5ft. / 8ft. nominal lengths.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 103.
- ♦ 120-277V (50/60Hz)
- ♦ 0-10V Dimming.

HOUSING

- ♦ Extrusion aluminum material with screw-less end caps.

LENS

- ♦ Polycarbonate lens provides a soft, evenly diffused light.

APPLICATIONS

- ♦ Lobbies
- ♦ Conference Rooms
- ♦ Showrooms
- ♦ Libraries
- ♦ Offices

INSTALLATIONS

- ♦ Designed for pendant mount with adjustable aircraft cable. Sliding brackets are provided for easy installation.
- ♦ Cable suspends 48" from ceiling. Other lengths available.
- ♦ Available as individual units or in continuous run applications supporting up to 550 watts.
- ♦ Suitable for ceiling surface mount applications.

LED

- ♦ Custom designed LED system with unique optics ensures perfectly even illumination.
- ♦ Dimming down to 10% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **LA617-4-40L-40K-U-D2**

LA617				U	D2		
SERIES	FIXTURE LENGTH	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	FINISH	OPTIONS
LA617	2 2FT. 4 4FT. 5 5FT. 8 8FT.	2FT. 20L 2000 4FT. 40L 4000 5FT. 54L 5400 8FT. 84L 8400	30K 3000K 35K 3500K 40K 4000K 45K 4500K 50K 5000K	U 120-277V	D2 0-10V Dimming to 10%*	WH White BK Black GR Grey	Emergency E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens Mounting SM Ceiling Surface Mount

*Compatible with 0-10V dimmers.

2FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
2000	3000K	19W	2010	108	✓
	4000K	19W	2041	109	✓
	5000K	19W	2065	112	✓

4FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
4000	3000K	37W	3908	105	✓
	4000K	38W	4056	108	✓
	5000K	37W	4114	110	✓

5FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
5400	3000K	52W	5373	103	✓
	4000K	51W	5387	106	✓
	5000K	51W	5545	108	✓


8FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
8400	3000K	74W	7758	105	✓
	3500K	73W	8081	110	✓
	4000K	73W	8403	114	✓
	4500K	73W	8726	119	✓
	5000K	73W	9048	124	✓

PHOTOMETRICS

Photometric reports are available at www.ullighting.net

DIMENSIONS

END VIEW

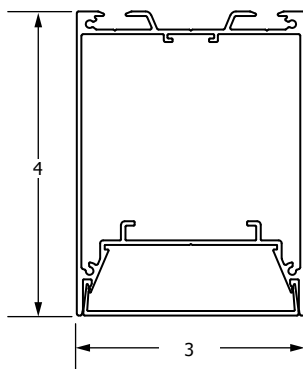

FIXTURE SIZE			
Nominal Size	Length (L)	Width (W)	Height (H)
2FT.	23.89 in.	2.95 in.	3.93 in.
4FT.	47.51 in.	2.95 in.	3.93 in.
5FT.	59.33 in.	2.95 in.	3.93 in.
8FT.	94.50 in.	2.95 in.	3.93 in.