

OVERVIEW

- ♦ The LA620 is a shallow linear luminaire. The small profile makes it an ideal choice for size restricted architectural applications.

FEATURES


- ♦ Available in 2ft. / 4ft. / 8ft. nominal lengths.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 127.
- ♦ 120-277V (50/60Hz)
- ♦ 0-10V Dimming.

HOUSING

- ♦ Constructed from heavy-gauge cold rolled steel.
- ♦ Completed with a white polyester polymer finish with high reflectivity.
- ♦ Electrical knockouts are provided on the housing back and ends.

LENS

- ♦ Linear acrylic lens that eliminates pixilation and emits high light transmission.

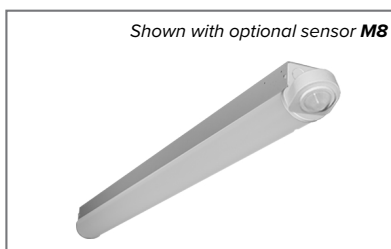

PROJECT _____

TYPE _____

QTY. _____

APPLICATIONS

- ♦ Store Aisle
- ♦ Display Areas

INSTALLATIONS

- ♦ Designed for ceiling surface mount applications.
- ♦ Available as individual units.

LED

- ♦ Custom designed LED system with unique optics ensures perfectly even illumination.
- ♦ Dimming down to 10% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
Exclusions may apply. Contact factory for terms and conditions.

♦

ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **LA620-4-45L-40K-U-D2**

LA620				U	D2			
SERIES	FIXTURE LENGTH	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	OPTIONS		
LA620	2 2FT. 4 4FT. 8 8FT.	2FT. 25L 2500 4FT. 33L 3300 42L 4200 45L 4500 51L 5100 59L 5900 8FT. 85L 8500	35K 3500K * 40K 4000K 50K 5000K	U 120-277V	D2 0-10V Dimming to 10%*	Emergency E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens Sensor M1 Infrared Occupancy On/Off Sensor, Externally Mounted M8 Infrared Occupancy Bi-Level Sensor, Externally Mounted		

*Compatible with 0-10V dimmers.

2FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
2500	3500K	19W	2348	127	✓
	4000K	20W	2600	130	✓
	5000K	19W	2432	131	✓

4FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
3300	3500K	25W	3232	132	✓
	4000K	25W	3325	133	✓
	5000K	25W	3321	134	✓
4200	3500K	32W	3811	119	✓
	4000K	32W	4224	132	✓
	5000K	32W	4256	133	✓
4500	3500K	35W	4405	129	✓
	4000K	35W	4620	132	✓
	5000K	35W	4690	134	✓
5100	3500K	38W	4928	130	✓
	4000K	40W	5200	130	✓
	5000K	40W	5240	131	✓
5900	3500K	45W	5679	127	✓
	4000K	46W	5980	130	✓
	5000K	46W	6026	131	✓

8FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
8500	3500K	65W	8450	130	✓
	4000K	65W	8580	132	✓
	5000K	65W	8645	133	✓

Other lumen packages are available. Consult factory.

* 3500K - Available on special request. Consult factory for availability.

DIMENSIONS

END VIEW

