

OVERVIEW

- ♦ The LA624 is a modern sleek linear luminaire that provides a soft, shadow free illumination.

FEATURES

- ♦ Available in 4ft. / 8ft. nominal lengths.
- ♦ CRI greater than 80.
- ♦ Rated Life [L70] — 50,000 Hours.
- ♦ Fixture lumens per watt ratios [LpW] — Greater than 102.
- ♦ 120-277V (50/60Hz)
- ♦ 0-10V Dimming.

HOUSING

- ♦ Extrusion aluminum material with screw-less end caps.

LENS


- ♦ Polycarbonate lens provides a soft, evenly diffused light.

- ♦
- ♦

PROJECT _____

TYPE _____

QTY. _____

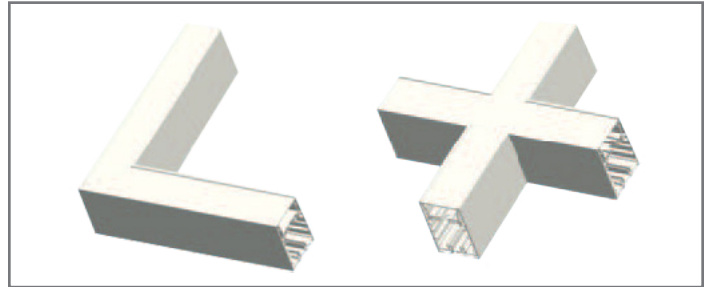

APPLICATIONS

- ♦ Lobbies
- ♦ Conference Rooms
- ♦ Showrooms
- ♦ Libraries
- ♦ Offices

INSTALLATIONS

- ♦ Designed for pendant mount with adjustable aircraft cable. Sliding brackets are provided for easy installation.
- ♦ Cable suspends 48" from ceiling. Other lengths available.
- ♦ Available as individual units or in continuous run applications supporting up to 3600 watts.
- ♦ Suitable for ceiling surface mount applications.

LED

- ♦ Custom designed LED system with unique optics ensures perfectly even illumination.
- ♦ Dimming down to 10% on 0-10V dimming controls is standard.

WARRANTY

- ♦ 5 year limited warranty is standard.
- Exclusions may apply. Contact factory for terms and conditions.*

ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **LA624-4-42L-40K-U-D2-WH**

LA624				U	D2		
SERIES	FIXTURE LENGTH	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING	FINISH	OPTIONS
LA624	4 4FT. 8 8FT.	4FT. 42L 4200 8FT. 77L 7700	30K 3000K 40K 4000K 50K 5000K	U 120-277V	D2 0-10V Dimming to 10%*	WH White BK Black GR Grey	Emergency E5 Emergency Battery Back-Up, 500 Lumens E7 Emergency Battery Back-Up, 700 Lumens E10 Emergency Battery Back-Up, 1000 Lumens E13 Emergency Battery Back-Up, 1300 Lumens Mounting SM Ceiling Surface Mount


*Compatible with 0-10V dimmers.

4FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
4200	3000K	40W	4120	103	✓
	4000K	40W	4280	107	✓
	5000K	40W	4320	108	✓

8FT. LUMEN PACKAGE					
Nominal Lumens	Color Temp.	Power (W)	Delivered Lumens	LpW	DLC
7700	3000K	75W	7650	102	✓
	4000K	75W	7725	103	✓
	5000K	75W	7875	105	✓

DIMENSIONS


END VIEW

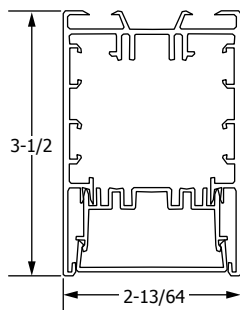

TOP VIEW




SIDE VIEW

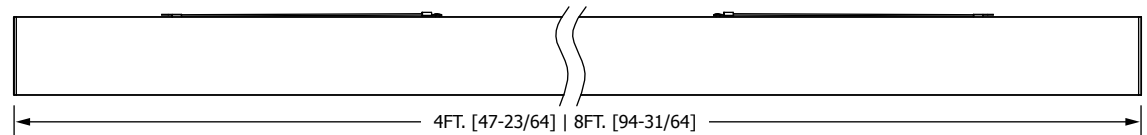


ALL DIMENSIONS TOLERANCE IS $\pm .03"$ [4FT.] / $\pm .07"$ [8FT.] UNLESS STATED OTHERWISE.

SPECIAL SHAPES - **+**

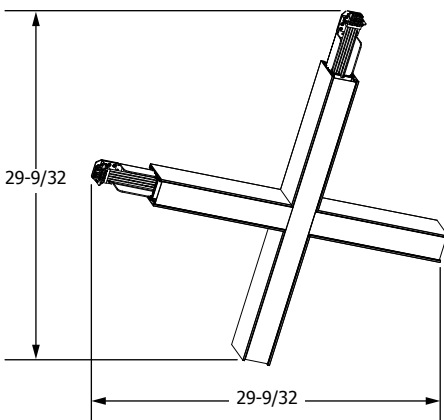

SPECIAL SHAPES - **L**

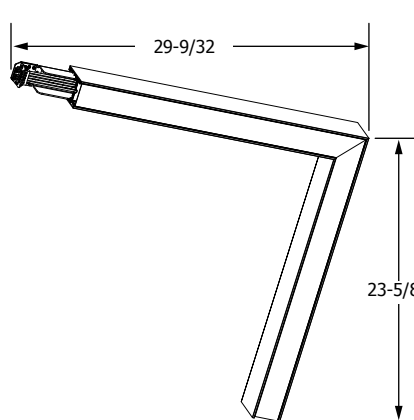

ALL DIMENSIONS TOLERANCE IS $\pm .07"$ UNLESS STATED OTHERWISE.