



FEATURES

- ◆ Available with 6" trim
- ◆ Compatible with most 5/6" recessed housings
- ◆ E26 Medium base socket adapter included
- ◆ 103° Beam Angle
- ◆ CRI greater than 90
- ◆ Rated Life [L70] — 50,000 Hours
- ◆ Fixture lumens per watt ratios [LpW] — Greater than 64
- ◆ Dimmable at 120V
- ◆ Mercury Free
- ◆ 5 year limited warranty is standard

LISTINGS/QUALIFICATIONS

- ◆ UL C/US
- ◆ Suitable for Wet Locations
- ◆ Energy Star



Dimmer Compatibility


Brand	Model	Brand	Model
LEVITON	DSL06	LUTRON	CTCL-153P
LEVITON	IPL06	LUTRON	DVCL-153P
LEVITON	6674		

ORDERING GUIDE

Fill in the boxes below with the corresponding **bold** options.

Example: **RB-6R-11L-30K-1-D3**

RB	6R	11L		1	D3
SERIES	FIXTURE SIZE	NOMINAL LUMENS	COLOR TEMP.	VOLTAGE	DIMMING
RB	6R 6" Round	6N.	27K 2700K	1 120V	D3 Dimmable 120V
		11L 1100	30K 3000K		
			40K 4000K		

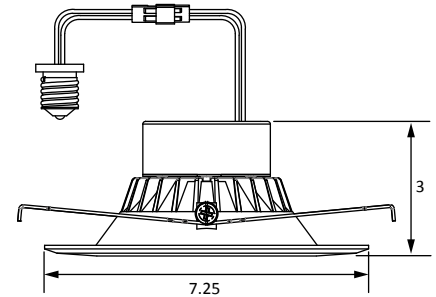

Lumen Packages

Item No.	Oder Code	Size	Nominal Lumens	Delivered Lumens	Color Temp.	Watts	LpW	Dimmable	UL	Energy Star
RB6R1127	RB-6R-11L-27K-1-D3	6"	1100	1020	2700K	16W	64	120V	✓	✓
RB6R1130	RB-6R-11L-30K-1-D3	6"	1100	1155	3000K	16W	72	120V	✓	✓
RB6R1140	RB-6R-11L-40K-1-D3	6"	1100	1250	4000K	15W	83	120V	✓	✓

- This unit is designed to be compatible with most leading edge or incandescent style rotary or slide type dimmers.(Dimming range 100% - 5%) Fixture performance may vary depending on dimmer manufacturer and circuit loading.
- Avoid mixing load types on the same circuit: Do not dim LED while also dimming CFL or incandescent loads.